



THE RIGHT PUMP FOR
TOUGH JOBS

KB SERIES


**HEAVY DUTY DEWATERING/LIGHT SLURRY
AGITATOR SUBMERSIBLE PUMPS**



**SETTLING BASINS, RETENTION PONDS & WASH SUMPS
OR ANY PUMP JOB WITH TOUGH SILT, SAND OR COAL FINES.**

KB PUMPS – SUPERIOR DEWATERING

KB Series *Top Discharge* Submersible Agitator Pumps
 “Pumps down to less than 6 inches”

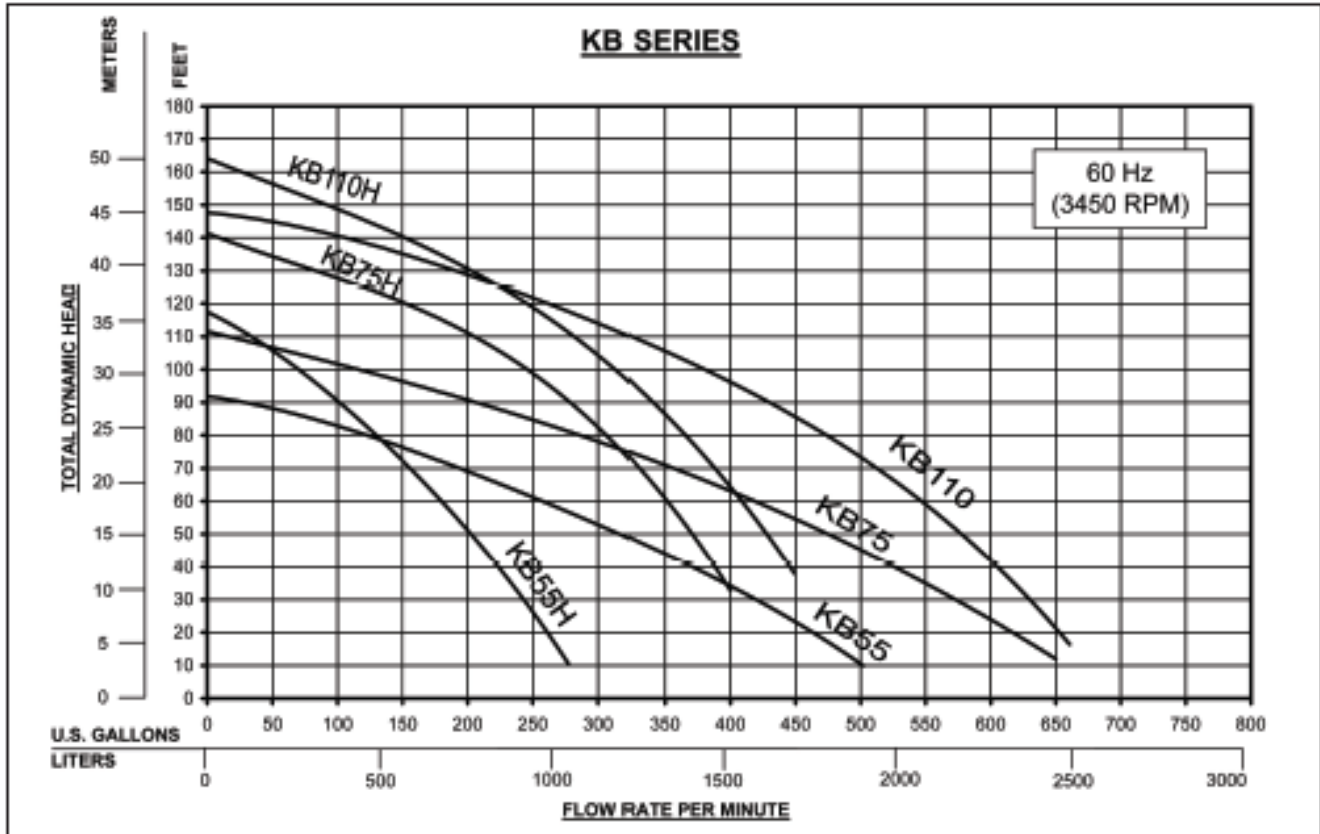

MODEL	DISCH. SIZE	H.P.	VOLT	RATED AMPS	MAX SOLIDS	MAX HEAD	MAX GPM	WEIGHT LBS	HEIGHT	WIDTH
KB55	4"	7.5	230/460	20.4/9.9	0.39"	91'	500	335	29.5'	13.8"
KB55H	3"	7.5	230/460	20.4/9.9	0.39"	117'	277	335	28.3'	13.8"
KB75	6"	10	230/460	27.3/13.6	0.39"	111'	650	357	32.5'	14.6"
KB75H	4"	10	230/460	27.3/13.6	0.39"	141'	400	357	31.3'	14.6"
KB110	6"	15	230/460	36.7/18.3	0.39"	147'	660	427	33.7'	14.6"
KB110H	4"	15	230/460	36.7/18.3	0.39"	164'	449	427	32.5'	14.6"

CONSTRUCTION

Abrasive resistant Hi Chrome Impeller, Wear Plate and Agitator.
 Double Mechanical Seal: Lower seal is SiC/SiC and upper seal is Carbon/Ceramic.

MOTOR

Insulation: Class H
 Voltages: Available in 230/460 and 575

Built-In thermal and amp overload protection
 Three phase, 3450 RPM with 50' power cord

WARNING: NOT FOR USE IN ANY FLAMMABLE LIQUIDS.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



123 Spencer Plain Road
 P.O. Box 1138
 Old Saybrook, CT 06475

Tel: (860)-399-5937
 Toll Free: (877)-BJM-PUMP
 Fax: (860)-399-7784

Web: www.bjmpumps.com

Distributor: