

# BJM CORP.

123 Spencer Plains Road,  
P.O. BOX 1138, Old Saybrook, CT 06475, USA  
(860) 399-5937 · (800) 442-2562 · Fax: (860) 399-7784  
Visit our web site: [www.bjmcop.com](http://www.bjmcop.com)

3/31/2003  
0803  
Supersedes  
0802

## TECHNICAL DATA MODEL R1500 BJM SUBMERSIBLE PUMP-CAST IRON



### GENERAL DATA

MAX. FLOW: GPM (L/min)	132 GPM (500 L/min)
MAX. HEAD: ft (m)	75.4' (23 m)
PUMP TYPE	TOP DISCHARGE, DEWATERING
STRAINER OPENING	0.25" (6.35 mm)
IMPELLER DIAMETER: in (mm)	5.04" (128 mm)
DISCHARGE SIZE	2" NPT-MALE
PUMP NET WEIGHT <sup>1</sup> : lbs (kg)	74 lbs (33.6 kg)
SHIPPING WEIGHT: lbs (kg)	80 lbs (36.4 kg)

1- Does not include power cord.

### CONSTRUCTION/MATERIAL DATA

MECHANICAL SEAL - UPPER	CARBON/CERAMIC
MECHANICAL SEAL - LOWER	SILICON CARBIDE/SILICON CARBIDE
OUTER CASING	304 SS
MOTOR CASING	304 SS
PUMP VOLUTE	CAST IRON
IMPELLER- MULTI VANE	CAST IRON
STRAINER	304 SS
BOTTOM PLATE	CAST IRON
LIPSEAL & O-RINGS	BUNA-N
ROTOR SHAFT	304 SS
EXTERNAL HARDWARE	304 SS
QTY. OIL IN SEAL CHAMBER	2.7 U.S. FL. OZ. (80 C.C.)
BALL BEARING: PERM. LUBE. UPPER	6203
BALL BEARING: PERM. LUBE. LOWER	6304

### ELECTRICAL /MOTOR DATA


MOTOR: TYPE, RATING HP	SUBMERSIBLE, 2
MOTOR RPM	3450
MOTOR INSULATION CLASS	F
MOTOR SERVICE FACTOR	1.1
VOLTAGE <sup>2</sup>	230, 1 PH, 60 Hz
CURRENT F.L.A.	14
MOTOR PROTECTION	THERMAL & AMP. OVERLOAD
POWER CORD <sup>3</sup> : GAGE; LENGTH	A.W.G. 14/3; 50' (15.2 m)
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)
MAXIMUM STATOR TEMPERATURE	230°F (110°C)

2- Available in other voltages (and in 50 Hz).

3- Available in different length.

REFER TO REVERSE SIDE FOR PUMP PERFORMANCE CURVES  
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

# MODEL: R1500

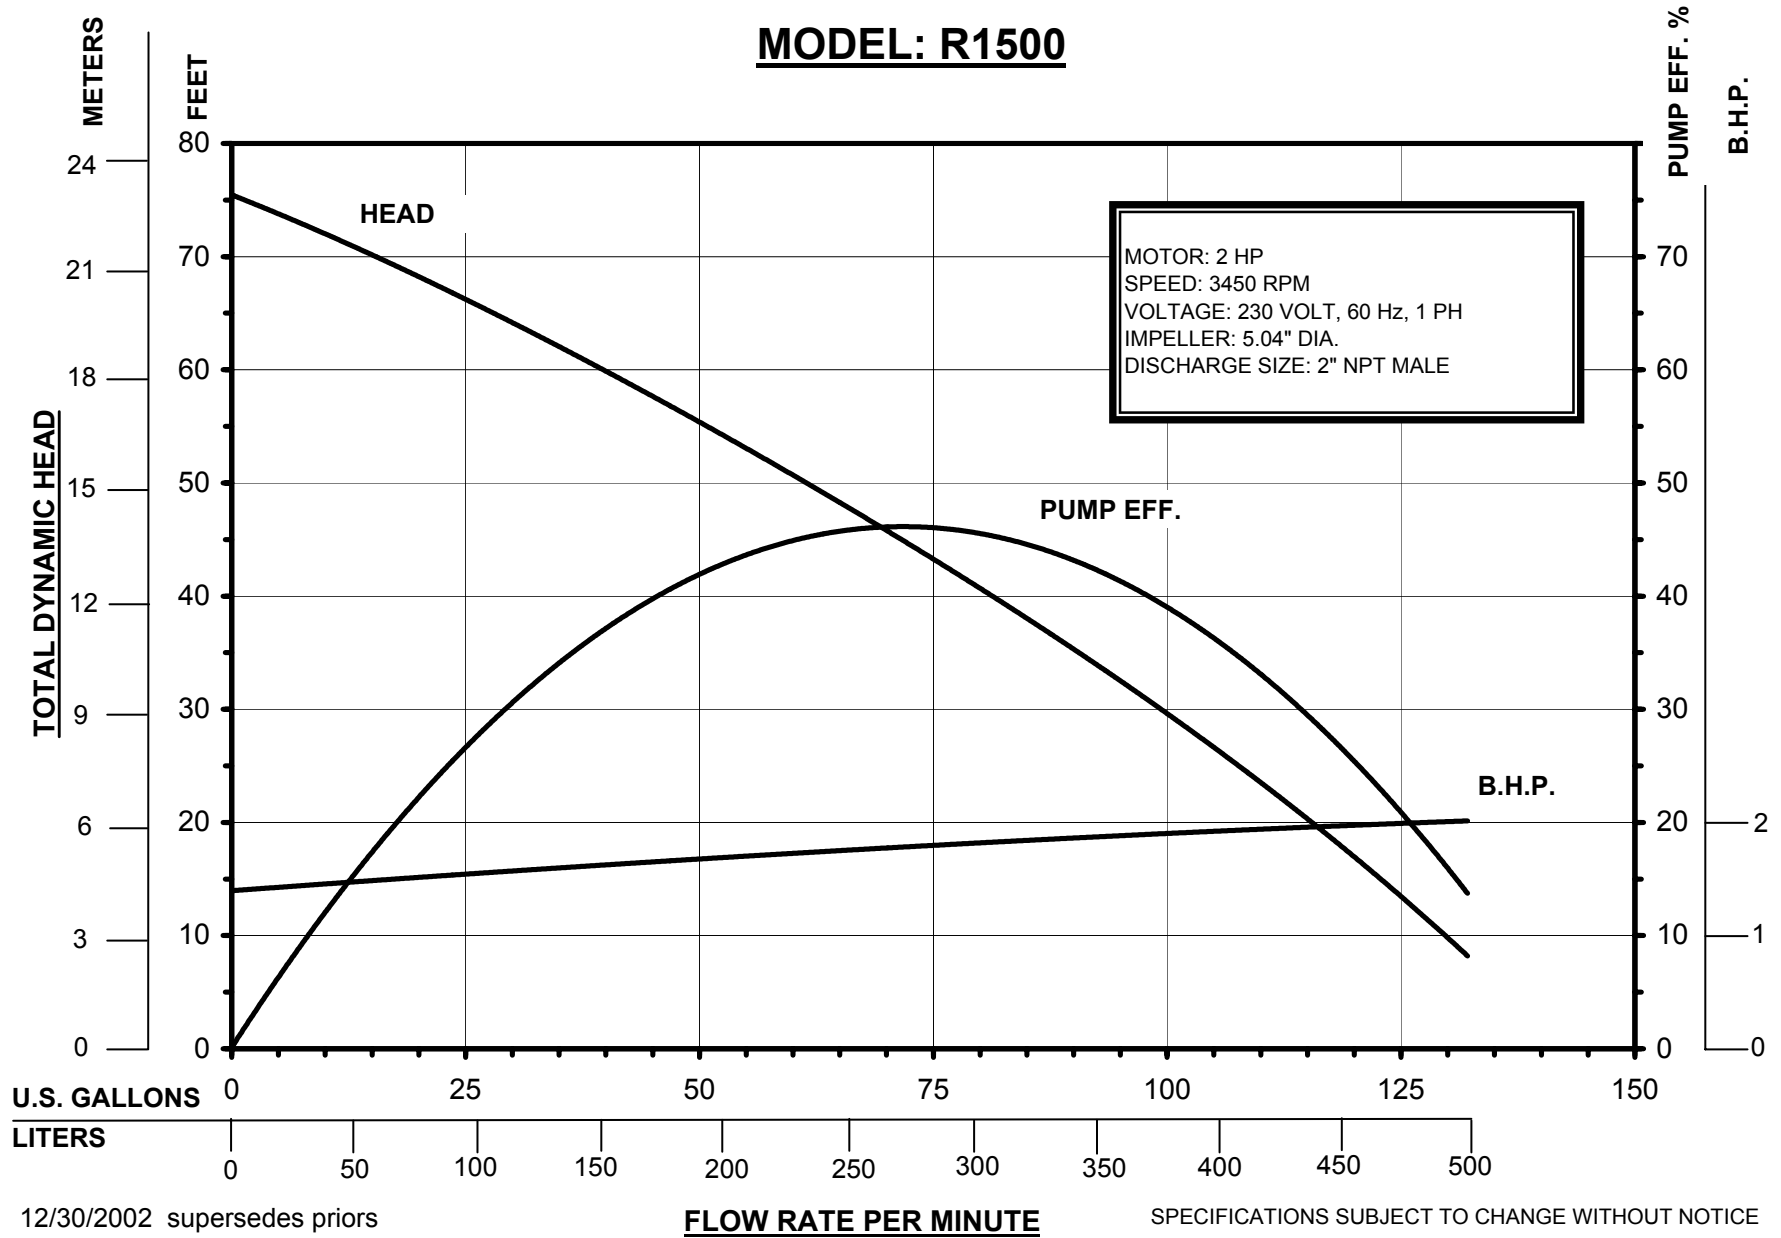

12/30/2002 supersedes priors

FLOW RATE PER MINUTE

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE