

# BJM CORP.

123 Spencer Plains Road,  
P.O. BOX 1138, Old Saybrook, CT 06475, USA  
(860) 399-5937 · (800) 442-2562 · Fax: (860) 399-7784  
Visit our web site: [www.bjmcorp.com](http://www.bjmcorp.com)

10/30/2002

0802

Supersedes

0801

## TECHNICAL DATA MODEL RX15SS BJM SUBMERSIBLE PUMP-316 SS

### GENERAL DATA

MAX. FLOW: GPM (L/min)	132 GPM (500 L/min)
MAX. HEAD: ft (m)	75.4' (23 m)
PUMP TYPE	TOP DISCHARGE, DEWATERING
STRAINER OPENING	0.25" (6.35 mm)
IMPELLER DIAMETER: in (mm)	5.04" (128 mm)
DISCHARGE SIZE	2" NPT-MALE
PUMP NET WEIGHT <sup>1</sup> : lbs (kg)	64 lbs (29.1 kg)
SHIPPING WEIGHT: lbs (kg)	70 lbs (31.8 kg)

1- Does not include power cord.

### CONSTRUCTION/MATERIAL DATA

MECHANICAL SEAL - UPPER	CARBON/CERAMIC
MECHANICAL SEAL - LOWER	SILICON CARBIDE/SILICON CARBIDE
OUTER CASING	316 SS
MOTOR CASING	316 SS
PUMP VOLUTE	316 SS
IMPELLER- MULTI VANE	316 SS
STRAINER	316 SS
BOTTOM PLATE	316 SS
LIPSEAL & O-RINGS	VITON
ROTOR SHAFT	316 SS
EXTERNAL HARDWARE	316 SS
QTY. OIL IN SEAL CHAMBER	2.7 U.S. FL. OZ. (80 C.C.)
BALL BEARING: PERM. LUBE. UPPER	6203
BALL BEARING: PERM. LUBE. LOWER	6304

### ELECTRICAL /MOTOR DATA


MOTOR: TYPE, RATING HP	SUBMERSIBLE, 2
MOTOR RPM	3450
MOTOR INSULATION CLASS	F
MOTOR SERVICE FACTOR	1.1
VOLTAGE <sup>2</sup>	230/460, 3 PH, 60 Hz
CURRENT F.L.A.	6/3
MOTOR PROTECTION	THERMAL & AMP. OVERLOAD
POWER CORD <sup>3</sup> : GAGE; LENGTH	A.W.G. 16/4; 50' (15.2 m)
MAXIMUM LIQUID TEMPERATURE	104°F (40°C)
MAXIMUM STATOR TEMPERATURE	230°F (110°C)

2- Available in other voltages (and in 50 Hz).

3- Available in different length.

REFER TO REVERSE SIDE FOR PUMP PERFORMANCE CURVES  
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

# MODEL: RX15SS

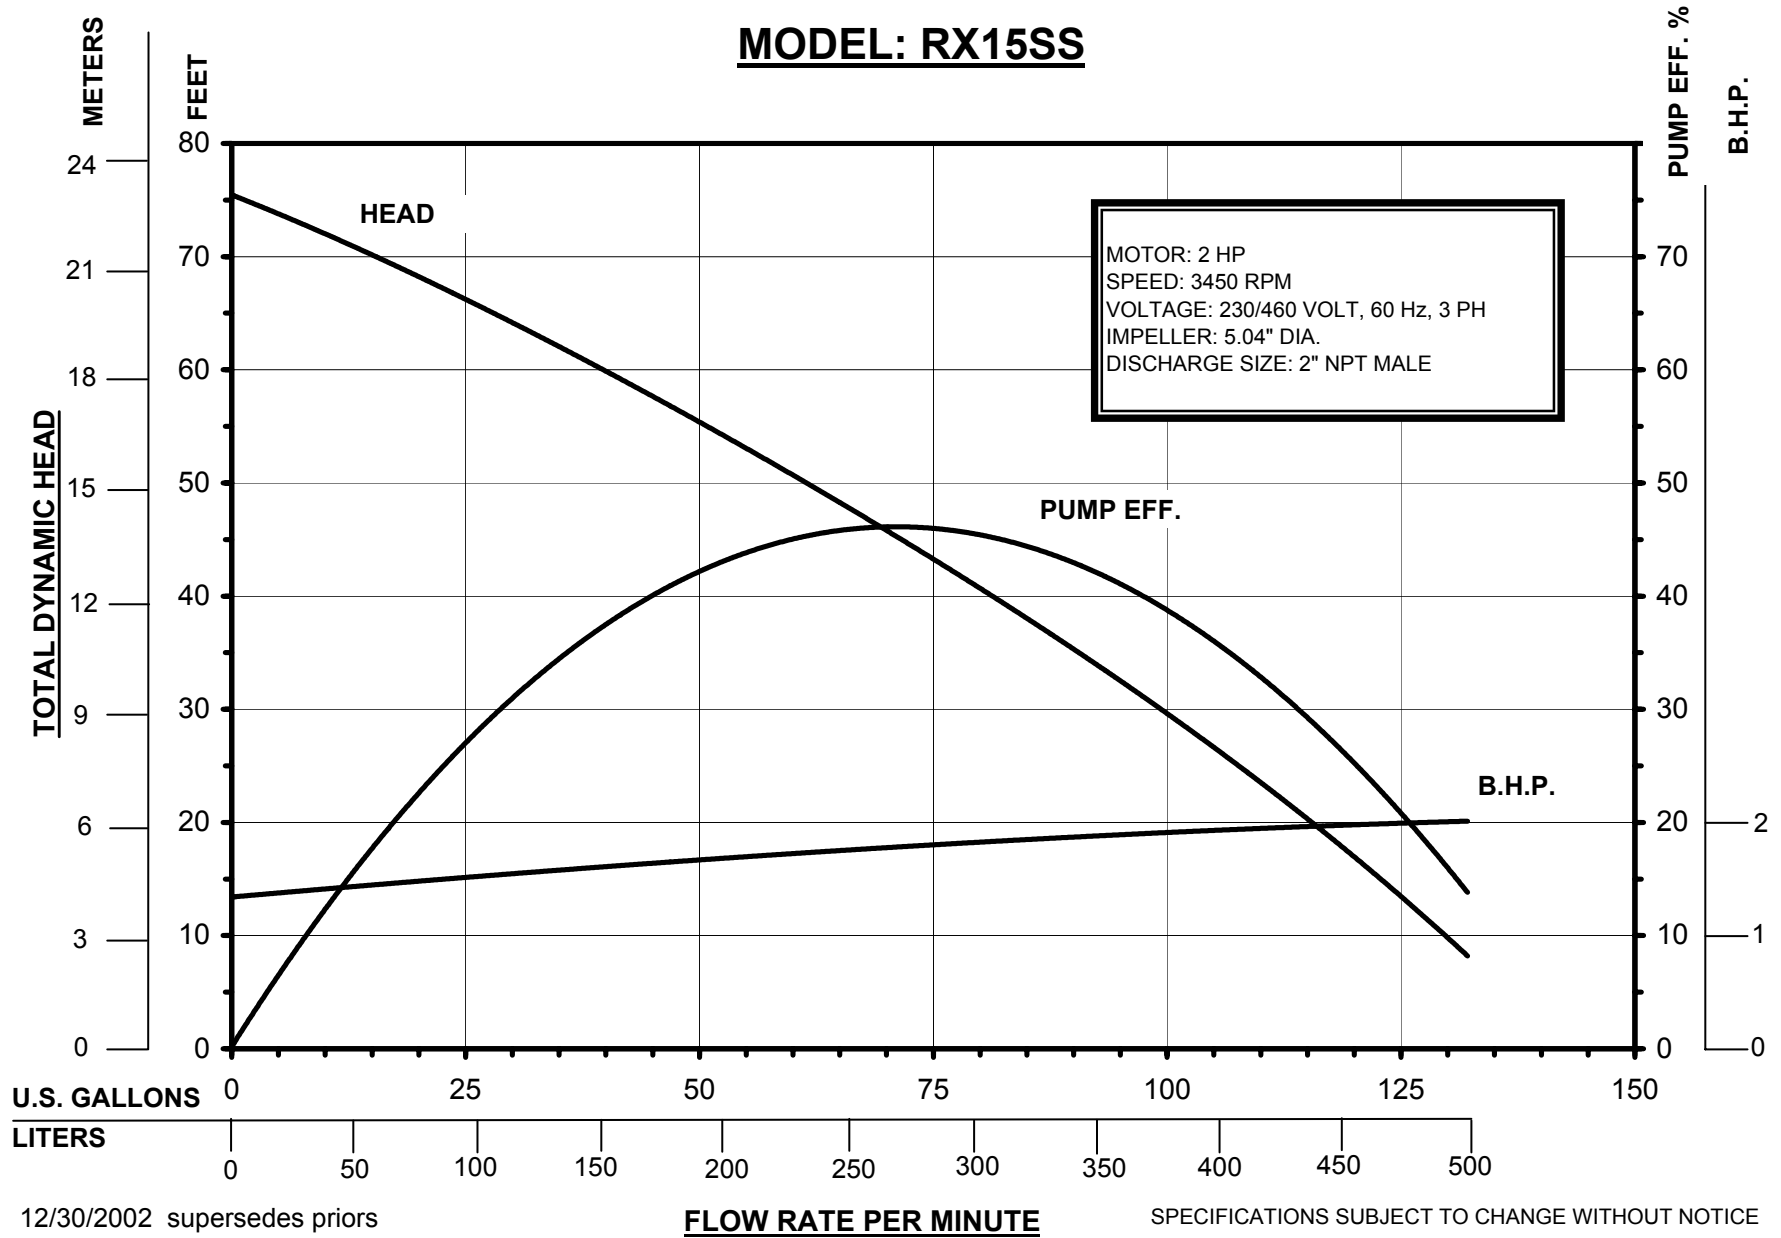

12/30/2002 supersedes priors

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE