

Series MP PULSAtron® Electronic Metering Pumps

Key Features:

- Automatic control via 4-20 mA and 20-4mA current signals can ratioed from 100% to 1% of incoming signal.
- Manual control allows for a combined 1000:1 turndown resulting in accurate metering for critical applications.
- Relay output for computer interface or AC power allows for external control.
- Six-button touch pad control with internationally recognized symbols for simplified programming.
- Simple prompts in plain language allow for easy-to-understand instructions for programming. **Available in three languages.**
- Alarm signals for signal loss, full count, circuit failure, pulse overflow and pulse rate high. Liquid low level indicator capability is standard.
- Timed sequences can be set for selected intervals and rate for repetitive metering.
- Pulse signals can be multiplied or divided by 1 to 999 allowing for pumps to handle peak requirements.
- LCD, 16 character dot matrix backlit multi-lingual display allows for easy reading and user-friendly directions.
- **Extended two year warranty** on electronic circuit board for trouble free service.

Complete Selection

Twenty distinct models are available having pressure capabilities to 300 PSIG @ 3 GPD, and flow capacities to 500 GPD @ 20 PSIG, with turndown ratios up to 1000:1. Metering performance is reproducible to within $\pm 2\%$ of maximum capacity.

Pump heads, cartridge check valve assemblies and tubing are stocked in several corrosion-resistant plastic, elastomeric and alloy materials along with stainless steel, that safely handle a wide variety of chemicals.

Please refer to the reverse side for **Series MP** specifications.

Operating Benefits

Reliable metering performance. Our guided check valves, with their state-of-the-art seat and ball designs, provide precise seating, and excellent priming and suction lift characteristics. Our timing circuit is highly reliable and, by design, virtually unaffected by temperature, EMI and other electrical disturbances.

Rated "hot" for continuous duty. **Series MP** pumps continue to meet their specifications for pressure and capacity even during extended use. That's because our high quality solenoid is separately encapsulated in a fin-cooled, thermo-conductive, enclosure that effectively dissipates heat.

High viscosity capability. A straight flow path and ample clearance between the diaphragm and head enable standard PULSAtron pumps to handle viscous chemicals up to a viscosity of 3000 CPS. For higher viscosity applications, larger, spring-loaded connections are available.

Leak-free, sealless, liquid end. Our diaphragms are of superior construction—teflon-faced, bonded to a composite of Hypalon and fabric layers, and reinforced with a metal insert for optimum flexibility and durability.

System Compatibility

A wide variety of chemicals can be pumped. Liquid end materials include glass-filled polypropylene (GFPP), PVC, styrene-acrylonitrile (SAN), Polyvinylidene Fluoride (PVDF), Teflon, Hypalon, Viton, ceramic, alloys and 316SS.

Immediate installation and start-up. Included as standard accessories with all models are an injection/back pressure valve assembly and a foot valve/strainer assembly*, including discharge and suction tubing (*not available with high viscosity connections for >3000 CPS).

Safe and easy priming and valve maintenance. Included as a standard accessory is a bleed valve assembly, including return tubing (available only on those models with tubing connections and ≤ 240 GPD).

Quick and economical liquid end maintenance. Available for every model is a unique KOPkit®, a convenient, economically priced, package containing new cartridge check valves and other important spare parts.



An ISO 9002 System-Certified Company

PULSAFEEDER

A Unit of IDEX Corporation

IDEX
CORPORATION



PULSAtron® Series MP Specifications

Important: *Series MP* — 20 model selections. Digit 1 and 2 (LM) signify product class, digit 3 and 4 signify pressure/flow.
For full model selection information refer to Price Schedule EMP-PS LX, or Reference Guide No. EMP-003.


Pressure and Flow Rate Capacity

Capacity, nominal	GPD	3	5	6	11	12	14	20	21	24	40	42	44	60	75	94	120	190	240	500
	GPH	0.13	0.20	0.25	0.45	0.50	0.58	0.83	0.87	1.0	1.66	1.75	1.83	2.5	3.17	3.91	5.00	8.00	10.00	20.00
	LPH	.49	.79	.95	1.73	1.89	2.20	3.15	3.31	3.78	6.31	6.62	6.94	9.5	11.83	14.82	18.93	29.96	37.85	78.85
300/21	LMK2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
250/17	—	LMB2	—	LMD3	—	—	LMF4	—	LMH4	—	—	—	—	—	—	—	—	—	—	—
150/10	—	—	LMA2	—	LMB3	—	—	LMD4	—	LMG4	—	LMK5	LMH5	—	—	—	—	—	—	—
100/7	—	—	—	—	LMA3	LMK3	—	—	LMB4	—	—	LME4	—	—	—	LMG5	LMH6	—	—	—
50/3.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	LMK7	—	—
35/2.4	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	LMH7	—
20/1.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	LMH8

Liquid End Materials

Series	Pump Head	Diaphragm	Check Valves		Fittings	Bleed Valve	Injection Valve Assembly Foot Valve Assembly	Tubing
			Seats/O-Rings	Balls				
<i>MP</i>	GFPPL PVC SAN PVDF 316SS	Teflon-faced Hypalon-backed	Teflon, Hypalon, Viton	Ceramic, Teflon, 316SS, Alloy C	GFPPL PVC PVDF 316SS	Same as fitting and check valve selected, except 316SS	Same as fitting and check valve	Clear PVC White PE

Dimensions

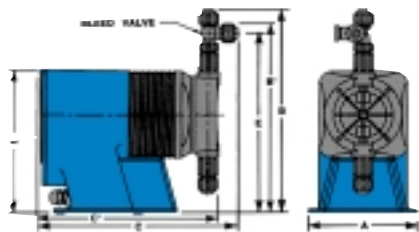

Series E Dimensions (inches)								
Model No.	A	B	B ¹	C	C ¹	D	E	Shipping Weight (Lbs.)
LMA2	5.4	10.3	—	10.8	—	7.5	9.0	13
LMA3	5.4	10.6	—	10.7	—	7.5	9.2	13
LMB2	5.4	10.3	—	10.8	—	7.5	9.0	13
LMB3	5.4	10.6	—	10.7	—	7.5	9.2	13
LMB4	5.4	10.6	—	10.7	—	7.5	9.2	13
LMD3	5.4	10.6	—	10.7	—	7.5	9.2	15
LMD4	5.4	10.6	—	10.2	—	7.5	9.2	15
LME4	5.4	10.6	—	10.2	—	7.5	9.2	15
LMF4	5.4	10.6	—	10.7	—	7.5	9.2	18
LMG4	5.4	10.6	—	10.7	—	7.5	9.2	18
LMG5	5.4	11.0	—	10.7	—	7.5	9.6	18
LMH4	6.1	11.0	—	10.2	—	8.2	9.6	21
LMH5	6.1	11.3	—	10.2	—	8.2	10.0	21
LMH6	6.1	11.3	—	10.2	—	8.2	10.0	21
LMH7	6.1	11.7	—	10.2	—	8.2	10.3	21
LMH8*	6.1	—	10.9	—	10.6	8.2	—	25
LMK2	5.4	10.3	—	10.8	—	7.5	9.0	13
LMK3	5.4	10.6	—	10.7	—	7.5	9.2	13
LMK5	5.4	11.0	—	11.7	—	7.5	9.6	18
LMK7	6.1	11.7	—	11.2	—	8.2	10.3	21

Note: Inches x 2.54 = cm
*The LMH8 is designed without a bleed valve.

Important: Material Code — GFPPL = Glass-filled Polypropylene, PVC = Polyvinyl Chloride, SAN = Styrene Acrylonitrile, PE = Polyethylene, PVDF = Polyvinylidene Fluoride. Teflon, Hypalon and Viton are registered trademarks of E.I. DuPont Company.

KOPkit®

Pulsafeeder has built a reputation for superior reliability by supplying carefully designed, high quality equipment. Even the best equipment, however, requires a minimal amount of maintenance. KOPkits are designed to guard against unnecessary downtime and assure you the highest level of efficient and uninterrupted service from our PULSAtron pumps. KOPkits contain recommended spare parts for those parts that usually require preventive maintenance. KOPkits immediately available in all wetted materials at very affordable prices.



PULSAtron's Full Range of Electronic Metering Pumps.



An ISO 9002 System-Certified Company

PULSAFEEDER

A Unit of IDEX Corporation



Standard Product Operations

27101 Airport Road • Punta Gorda, Florida 33982

Sheet provided by : KTH Sales, Inc. www.KTHSales.com

Technical Sheet No. EMP-027.
PULSAtron and Kopkit are trademarks of Pulsafeeder.