

Part Selection Guide

BELLOWS METERING PUMPS

Order Notes: One "X" and one "T" code for each bellows module is required. (When ordering tandem pumps, the largest bellows module is nearest the gearmotor.)

Example: 13726-014 (1½" x 1½" two tandem standard model) with EPT/EPDM poppet valves and O-rings and ⅜" elbow connectors would be ordered as a 13726-014 X-112 T-008 X-112 T-008.

Tubing Connectors



T-001



T-002



T-003



T-004



T-005




T-006



T-007



T-008



T-009



T-011



T-012



T-013



T-014

T-CODES

T-Code	For Elastomeric Tubing Size	Connector Type	Bellows Module Size
T-001	⅛" I.D. x ¼" O.D.	Barbed Compression	½"
T-002	¼" I.D. x ⅜" O.D.	Barbed Compression	½"
T-003	⅜" I.D.	Barbed	1", 1½" & 2½"
T-004	½" I.D.	Barbed	1", 1½" & 2½"
T-005	⅛" pipe thread	Female NPT	1", 1½" & 2½"
T-006**	⅛" I.D. x ¼" O.D.	Barbed Compression	1", 1½" & 2½"
T-007**	¼" I.D. X ⅜" O.D.	Barbed Compression	1", 1½" & 2½"
T-008	⅜" I.D.	Elbow Swivel, Barbed	1", 1½" & 2½"
T-009	½" I.D.	Elbow Swivel, Barbed	1", 1½" & 2½"
T-011	¼" I.D.	Elbow Swivel, Barbed	1", 1½" & 2½"
T-012*	4mm (⅝") I.D.	Elbow Swivel, Barbed	1", 1½" & 2½"
T-013*	4mm (⅝") I.D.	Elbow Swivel, Barbed	½"
T-014	¼" I.D.	Barbed	1", 1½" & 2½"


For flows of 1800 ml/min and above, ½" I.D. tubing connectors recommended.

*Use of 4mm connector is limited by flow rate; please contact factory with specifications.

**Cost added for connector.

BELLOWS METERING PUMPS - PART SELECTION

Poppet Valves and O-Rings



1/2" Poppet Kit




1", 1 1/2" and 2 1/2" Poppet Kit


X-CODES			
Materials	1/2" Bellows	1" & 1 1/2" Bellows	2 1/2" Bellows
Butyl	—	X-111	X-121
*EPT/EPDM	X-002	X-112	X-122
Hydrin	X-003	X-113	X-123
**Kel F®	X-004	X-114	X-124
*Hypalon®	X-005	X-115	X-125
*Viton®/ Fluoroelastomer	X-006	X-116	X-126
Silicone	X-008	X-118	X-128
Nitrile	—	X-119	X-129

*Indicates stocked elastomer. **Cost added for material.

Duckbill Valves and O-Rings

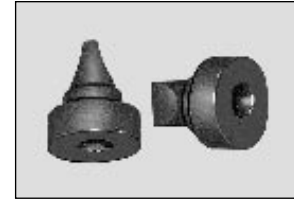

1/2" Bellows Kit

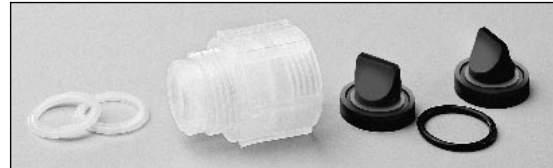

1", 1 1/2" and 2 1/2" Bellows Kit

(Valve extension required only on suction port.)

X-CODES			
Materials	1/2" Bellows	1" & 1 1/2" Bellows	2 1/2" Bellows
Butyl	X-091	X-031	X-041
*EPT/EPDM	X-092	X-032	X-042
Hydrin	X-093	X-033	X-043
**Kel F®	X-094	X-034	X-044
*Hypalon®	X-095	X-035	X-045
**Viton®/ Fluoroelastomer	X-096	X-036	X-046
Silicone	X-098	X-038	X-048
Nitrile	X-099	X-039	X-049

*Indicates stocked elastomer. **Cost added for material.